




UÑAS

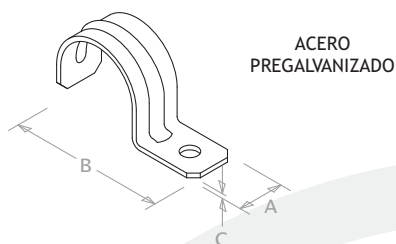

ACERO
PREGALVANIZADO

Para Conduit Pared Delgada

Tamaño Nominal mm pulg	Usar Tornillo	Dimensiones mm A B C	Peso Aprox. por Ciento	Clave Pedido
13 1/2"	# 12	16 40 1.2 (C.18)	0.9 kg	UC 12
19 3/4"	# 12	19 45 1.2 (C.18)	1.3 kg	UC 34
25 1"	# 12	19 52 1.2 (C.18)	1.6 kg	UC 100
32 1 1/4"	1/4"	25 75 1.5 (C.16)	3.7 kg	UC 114
38 1 1/2"	1/4"	25 81 1.5 (C.16)	4.1 kg	UC 112
51 2"	1/4"	25 92 1.5 (C.16)	5.0 kg	UC 200

Para Conduit Pared Gruesa

Tamaño Nominal mm pulg	Usar Tornillo	Dimensiones mm A B C	Peso Aprox. por Ciento	Clave Pedido
Industrial				
10 3/8"	1/4"	16 36 1.5 (C.16)	1.0 kg	UT 38
13 1/2"	1/4"	16 45 1.5 (C.16)	1.3 kg	UT 12
19 3/4"	1/4"	19 54 1.9 (C.14)	2.4 kg	UT 34
25 1"	1/4"	19 60 1.9 (C.14)	2.9 kg	UT 100
32 1 1/4"	5/16"	25 80 1.9 (C.14)	5.0 kg	UT 114
38 1 1/2"	5/16"	25 86 1.9 (C.14)	5.6 kg	UT 112
51 2"	5/16"	31 98 2.5 (C.12)	11.8 kg	UT 200
64 2 1/2"	3/8"	31 132 2.5 (C.12)	15.5 kg	UT 212
76 3"	3/8"	31 148 3.5 (C.10)	23.0 kg	UT 300
102 4"	3/8"	31 174 3.5 (C.10)	28.5 kg	UT 400


Comercial

13 1/2"	# 12	16 40 1.2 (C.18)	1.0 kg	UE 12
19 3/4"	# 12	19 45 1.2 (C.18)	1.5 kg	UE 34
25 1"	# 12	19 52 1.2 (C.18)	1.9 kg	UE 100
32 1 1/4"	1/4"	25 75 1.5 (C.16)	4.0 kg	UE 114
38 1 1/2"	1/4"	25 81 1.5 (C.16)	4.4 kg	UE 112
51 2"	1/4"	25 92 1.5 (C.16)	5.4 kg	UE 200

Para Tubo Cobre & Tubing

Tubo Cobre mm pulg	Usar Tornillo	Dimensiones mm A B C	Peso Aprox. por Ciento	Clave Pedido
10 3/8"		16 28 1.2 (C.18)	0.5 kg	UCR 14
13 1/2"		16 34 1.2 (C.18)	0.6 kg	UCR 38
16 5/8"		16 38 1.5 (C.16)	1.1 kg	UCR 12
22 7/8"		16 46 1.5 (C.16)	1.4 kg	UCR 34

OMEGAS

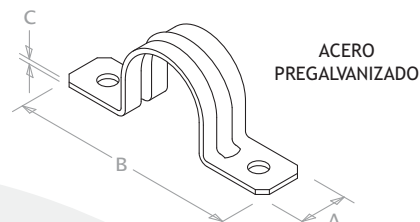

ACERO
PREGALVANIZADO

Para Conduit Pared Delgada

Tamaño Nominal mm pulg	Usar Tornillo	Dimensiones mm A B C	Peso Aprox. por Ciento	Clave Pedido
13 1/2"	# 8	14 56 1.2 (C.18)	1.1 kg	OC 12
19 3/4"	# 8	16 61 1.2 (C.18)	1.5 kg	OC 34
25 1"	# 8	16 67 1.2 (C.18)	2.2 kg	OC 100
32 1 1/4"	# 10	22 89 1.2 (C.18)	3.0 kg	OC 114
38 1 1/2"	# 10	22 95 1.2 (C.18)	3.4 kg	OC 112
51 2"	# 10	22 106 1.2 (C.18)	4.0 kg	OC 200

Para Conduit Pared Gruesa

Tamaño Nominal mm pulg	Usar Tornillo	Dimensiones mm A B C	Peso Aprox. por Ciento	Clave Pedido
Industrial				
13 1/2"	1/4"	19 65 1.5 (C.16)	2.1 kg	OT 12
19 3/4"	1/4"	19 71 1.5 (C.16)	2.4 kg	OT 34
25 1"	1/4"	19 78 1.5 (C.16)	2.8 kg	OT 100
32 1 1/4"	1/4"	25 99 1.9 (C.14)	6.0 kg	OT 114
38 1 1/2"	1/4"	25 105 1.9 (C.14)	6.6 kg	OT 112
51 2"	1/4"	25 117 1.9 (C.14)	7.8 kg	OT 200
64 2 1/2"	3/8"	31 155 2.5 (C.12)	17.0 kg	OT 212
76 3"	3/8"	31 171 2.5 (C.12)	20.0 kg	OT 300
102 4"	3/8"	31 197 2.5 (C.12)	24.5 kg	OT 400

Comercial

13 1/2"	# 8	16 63 1.2 (C.18)	1.4 kg	OE 12
19 3/4"	# 8	19 68 1.2 (C.18)	1.9 kg	OE 34
25 1"	# 8	19 75 1.2 (C.18)	2.2 kg	OE 100
32 1 1/4"	# 10	25 93 1.5 (C.16)	4.7 kg	OE 114
38 1 1/2"	# 10	25 99 1.5 (C.16)	5.1 kg	OE 112
51 2"	# 10	25 111 1.5 (C.16)	6.0 kg	OE 200

Para Bajadas PVC

Tamaño Nominal mm pulg	Usar Tornillo	Dimensiones mm A B C	Peso Aprox. por Ciento	Clave Pedido
152 6"	5/16"	31 270 3.5 (C.10)	45.0 kg	OT 600
203 8"	5/16"	31 320 3.5 (C.10)	56.0 kg	OT 800
254 10"	3/8"	31 375 3.5 (C.10)	68.0 kg	OT 1000
305 12"	3/8"	31 425 3.5 (C.10)	79.0 kg	OT 1200